


LEDsmart™

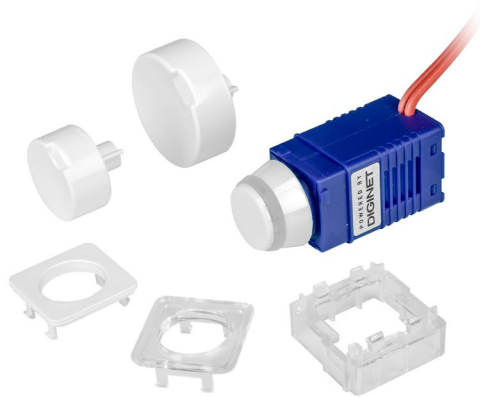



LEDSMART PHASE-CUT DIMMER

PRODUCT DETAILS:

- Simple dimming control for LED lamps and light fixtures
- Excellent compatibility with other common lamp types such as incandescent lamps, 12V halogen (dichroic) lamps/ transformers and CFL's
- 2W - 400W load
- Configurable minimum brightness with mechanical adjustment
- Minimum brightness typically 0%
- Separately switched 2-wire design – no neutral wire connection required for wallplate retrofit installation
- An integrated LED indicator illuminates the dimmer knob
- Incorporates a thermal fuse to protect itself against overheating
- Incorporates filtering to reduce load brightness variation under conditions of line voltage ripple signal injection
- Thermal wind-back for overload and over-temperature protection
- "Soft-start" to help prolong the lamp and driver life
- Inherent immunity to installation wiring short circuit fault
- Warranty: 2 year

APPLICATIONS:

Wall mount, Internal
Apartments, Residential housing

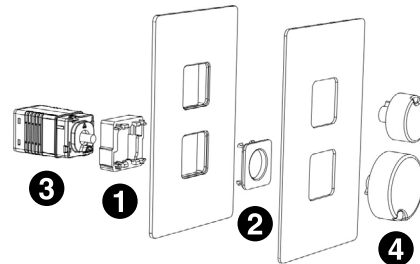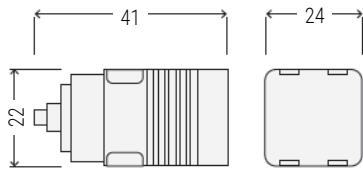

COMPATIBLE WITH PDL 600, PDL SATURN ZEN, LEGRAND EXCEL, CLIPSAL 2000 AND HPM EXCEL XLP770 SWITCH PLATES.

INSTRUCTIONS FOR PDL600 PLATE:

1. Clip the rear adaptor onto the PDL600 plate (ensure orientation is correct)
2. Clip the front adaptor cover to the adaptor
3. Fit the dimmer module to the rear adaptor
4. Fit the switch plate and knob (big or small)

CODE	DESCRIPTION
MEDM-KIT	LEDSMART PHASE-CUT ROTARY DIMMER KIT